

(19)  Canadian  
Intellectual Property  
Office

An Agency of  
Industry Canada

Office de la Propriété  
Intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

(11) **CA 2 310 923**

(13) **A1**

(40) 09.12.2000

(43) 09.12.2000

(12)

(21) 2 310 923

(51) Int. Cl.<sup>7</sup>: **H04L 12/66, H04Q 7/36**

(22) 07.06.2000

(30) 11-162553 JP 09.06.1999

(71) **NEC CORPORATION,**  
7-1, Shiba 5-chome  
Minato-ku, TOKYO, XX (JP).

(72) **NITTA, TOSHIO (JP).**


(74) **SMART & BIGGAR**


(54) METHODE DE TRANSMISSION D'UN RESEAU DE COMMUNICATION TCP/IP VERS UN RESEAU MOBILE DE COMMUNICATION ET SYSTEME CONNEXE D'EMISSION ET DE RECEPTION

(54) METHOD OF TRANSMISSION FROM TCP/IP COMMUNICATION NETWORK TO MOBILE COMMUNICATION NETWORK AND TRANSMISSION AND RECEPTION SYSTEM THEREFOR

(57)

The TCP/IP mobile communication network transmission and reception system for conducting transmission from a TCP/IP communication network to a mobile communication network includes a provider access server for the connection of a TCP/IP communication network to receive an IP packet in which an IP address of a mobile communication terminal as a destination of transmission from the TCP/IP communication network is stored at a header, and a mobile communication switching system for extracting an IP address from a header of an IP packet sent from the provider access server and searching for a user's telephone number corresponding to the IP address to send an originating signal and a selection signal based on the searched user's telephone number to a mobile communication network on the side of said mobile communication terminal.

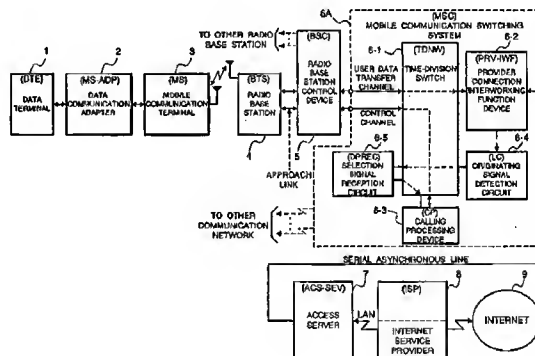



(72) NITTA, TOSHIO, JP


(71) NEC CORPORATION, JP

(51) Int.Cl.<sup>7</sup> H04L 12/66, H04Q 7/36

(30) 1999/06/09 (11-162553) JP

(54) **METHODE DE TRANSMISSION D'UN RESEAU DE  
COMMUNICATION TCP/IP VERS UN RESEAU MOBILE DE  
COMMUNICATION ET SYSTEME CONNEXE D'EMISSION  
ET DE RECEPTION**

(54) **METHOD OF TRANSMISSION FROM TCP/IP  
COMMUNICATION NETWORK TO MOBILE  
COMMUNICATION NETWORK AND TRANSMISSION AND  
RECEPTION SYSTEM THEREFOR**

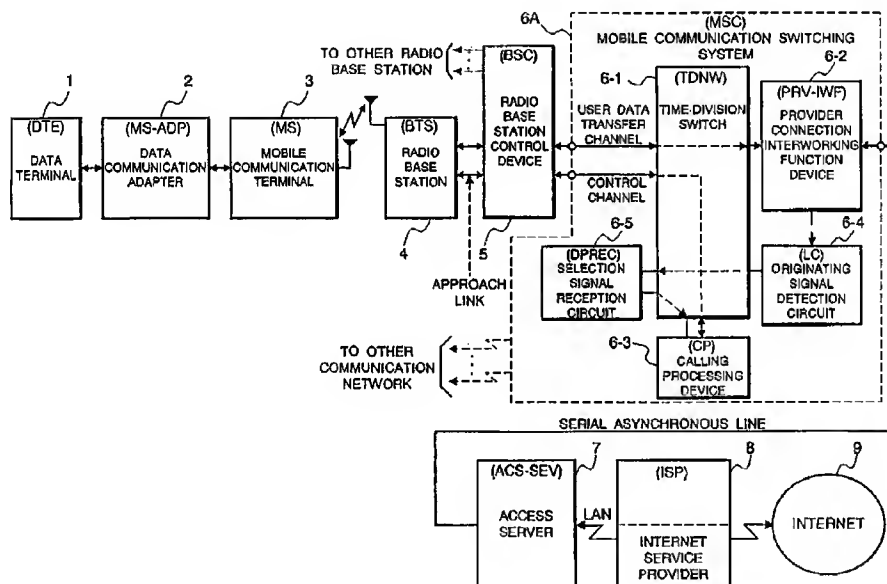

(57) The TCP/IP mobile communication network transmission and reception system for conducting transmission from a TCP/IP communication network to a mobile communication network includes a provider access server for the connection of a TCP/IP communication network to receive an IP packet in which an IP address of a mobile communication terminal as a destination of transmission from the TCP/IP communication network is stored at a header, and a mobile communication switching system for extracting an IP address from a header of an IP packet sent from the provider access server and searching for a user's telephone number corresponding to the IP address to send an originating signal and a selection signal based on the searched user's telephone number to a mobile communication network on the side of said mobile communication terminal.



ABSTRACT OF THE DISCLOSURE

The TCP/IP mobile communication network transmission and reception system for conducting transmission from a TCP/IP communication network to a mobile communication network includes a provider access server for the connection of a TCP/IP communication network to receive an IP packet in which an IP address of a mobile communication terminal as a destination of transmission from the TCP/IP communication network is stored at a header, and a mobile communication switching system for extracting an IP address from a header of an IP packet sent from the provider access server and searching for a user's telephone number corresponding to the IP address to send an originating signal and a selection signal based on the searched user's telephone number to a mobile communication network on the side of said mobile communication terminal.

METHOD OF TRANSMISSION FROM TCP/IP COMMUNICATION NETWORK  
TO MOBILE COMMUNICATION NETWORK AND TRANSMISSION AND  
RECEPTION SYSTEM THEREFOR

5

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to communication  
between a mobile communication network for a personal  
digital cellular telecommunication system (PDC) etc. and  
10 a TCP/IP (Transmission Control Protocol/Internet  
Protocol) communication network and, more particularly,  
to a method of transmission from a TCP/IP communication  
network to a mobile communication network for conducting  
transmission from a TCP/IP communication network to a  
15 mobile communication terminal accommodated in a mobile  
communication network for a personal digital cellular  
telecommunication system etc. (reception at the mobile  
communication terminal side) and a transmission and  
reception system therefor.

20

DESCRIPTION OF THE RELATED ART

Conventionally proposed is a technique of  
transferring data from a terminal (personal computer)  
and the like accommodated in a TCP/IP communication  
network (intranet, Internet, extranet) to a non-TCP/IP  
25 communication network, for example, the mobile  
communication terminal accommodated in a mobile

communication network for a personal digital cellular telecommunication system (PDC) (e.g. "Method and System for Enabling Mobile Station to Participate in Data Communication" recited in Japanese Patent Laying-Open  
5 (Kokai) No. Heisei 11-27290).

Such a mobile communication terminal in a personal digital cellular telecommunication system conducts communication with a TCP/IP communication network through this mobile communication network. In  
10 this case, transmission from a mobile communication terminal to an Internet service provider is possible, while transmission using an IP packet from an Internet user (a terminal accommodated in the TCP/IP communication network) to a mobile communication  
15 terminal through an Internet service provider (reception at the mobile communication terminal side) is not possible in some cases.

Fig. 5 is a block diagram showing a structure of a conventional mobile communication system and Fig. 6 is  
20 a block diagram showing a structure of main components of a provider connection interworking function device for establishing Internet connection in the conventional mobile communication system. Fig. 7 is a diagram showing a sequence at the time of Internet connection in the  
25 conventional mobile communication system (transmission from a mobile communication terminal).

In Fig. 5, a data terminal (DTE) 1 such as a

general-purpose small-sized computer (PC) conducts transmission to a terminal (e.g. personal computer) accommodated in the Internet (AT command (ATD)). In response to this transmission, a data communication  
5 adapter (MS-ADP) 2, a mobile communication terminal (MS) 3, a radio base station (BTS) 4, a radio base station control device (BSC) 5 and a mobile communication switching system (MSC) 6 (calling processing device (CP) 6c/time-division switch (TDNW) 6a) are sequentially  
10 connected through a line by setup. At the mobile communication switching system 6, by the processing by the calling processing device 6c/the time-division switch 6a, a seizing signal (SEZ) is sent out to a provider connection interworking function device (PRV-  
15 IWF) 6b.

The provider connection interworking function device 6b returns an acknowledge (ACK) in response to the seizing signal (SEZ) to the mobile communication switching system 6. The mobile communication switching  
20 system 6 sets a radio-side path. The data communication adapter 2 and the provider connection interworking function device 6b set an automatic retransmission request (ARQ).

The provider connection interworking function  
25 device 6b returns an answer (ANS) to the mobile communication switching system 6. The mobile communication switching system 6 sets a network-side

path. The data terminal 1 sends an Internet  
protocol/transmission control protocol/synchronizing  
signal (IP+TCP(SYN)) to an access server (ACC-SER) 7 in  
an Internet service provider (ISP) 8. The access server  
5 7 sends out the Internet protocol/transmission control  
protocol/synchronizing signal (IP+TCP (SYN)) to an  
Internet 9. Thereafter, between the data terminal 1 and  
a terminal not shown which is accommodated in the  
Internet 9, HTML data transmission etc. is conducted by  
10 TCP/IP link open.

In Fig. 6, at the provider connection  
interworking function device 6b, terminating processing  
circuits (ARQ-RX and ARQ-TX) 10a and 10b conduct  
terminating processing of an error control protocol on  
15 the side of a radio line. Asynchronous terminating  
processing circuits (ASYNC-RX and ASYNC-TX) 11a and 11b  
conduct terminating processing with respect to  
communication over a serial asynchronous line with the  
access server 7 on the side of the Internet service  
20 provider 8.

In this operation, the calling processing device  
6c of the mobile communication switching system 6  
controls the time-division switch 6a to set a user data  
transfer channel and a control channel with the radio  
25 base station control device 5. Also, an approach link is  
set between the radio base station (BTS) 4 and the radio  
base station control device (BSC) 5.

As described in the foregoing, the above conventional art fails to enable an Internet user (terminal) to conduct transmission using an IP packet to a mobile communication terminal (reception at the mobile communication terminal side) through an Internet service provider, which accordingly makes, for example, HTML data transmission impossible and causes inconvenience in use.

#### SUMMARY OF THE INVENTION

An object of the present invention is to solve such problems of conventional art as mentioned above and provide a method of conducting transmission from a TCP/IP communication network to a mobile communication network which allows a relatively simple structure to realize transmission using an IP packet to a mobile communication terminal accommodated in a mobile communication network for a personal digital cellular telecommunication system etc. from a terminal accommodated in a TCP/IP communication network (reception at the mobile communication terminal side) while allowing facility in use to be improved, and a transmission and reception system therefor.

Another object of the present invention is to provide a method of conducting transmission from a TCP/IP communication network to a mobile communication network which allows a user of the TCP/IP communication



network to freely set an IP address and a user's telephone number to further improve its convenience and a transmission and reception system therefor.

According to one aspect of the invention, a  
5 TCP/IP mobile communication network transmission and reception system for conducting transmission from a TCP/IP communication network to a mobile communication network, comprises

a provider access server for the connection of a  
10 TCP/IP communication network to receive an IP packet in which an IP address of a mobile communication terminal as a destination of transmission from the TCP/IP communication network is stored at a header, and

a mobile communication switching system for  
15 extracting an IP address from a header of an IP packet sent from the provider access server and searching for a user's telephone number corresponding to the IP address to send an originating signal and a selection signal based on the searched user's telephone number to a  
20 mobile communication network on the side of the mobile communication terminal.

In the preferred construction, the mobile communication switching system includes

a time-division switch for conducting time-  
25 division switching of line switching,

a provider connection interworking function device for extracting an IP address of the mobile

communication terminal as a transmission destination  
stored in an IP packet sent from the provider access  
server and searching for a user's telephone number  
corresponding to the IP address to output a selection  
5 signal and an originating signal based on the searched  
user's telephone number,

an originating signal detection circuit for  
detecting an originating signal from the provider  
connection interworking function device,  
10 a selection signal reception circuit for  
receiving a selection signal from the provider  
connection interworking function device, and  
a calling processing device for executing control  
to send an originating signal from the originating  
15 signal detection circuit and a selection signal from the  
selection signal reception circuit to the mobile  
communication network on the side of the mobile  
communication terminal.

In another preferred construction, the provider  
20 connection interworking function device includes

a terminating processing circuit for conducting  
terminating processing of an error control protocol on  
the side of a radio line,

an asynchronous terminating processing circuit  
25 for conducting terminating processing with respect to  
communication on a serial asynchronous line with the  
provider access server for TCP/IP communication network

line connection,

a synchronous pattern detection circuit for detecting a synchronous pattern to determine first arrival of an IP packet transferred through the asynchronous terminating processing circuit,

an IP address/telephone number converting circuit for searching for a user's telephone number corresponding to an IP address of the mobile communication terminal as a transmission destination which is stored in a header of an IP packet from the synchronous pattern detection circuit, and

a transmission signal sending circuit for sending out an originating signal and a selection signal to the mobile communication switching system based on a user's telephone number from the IP address/telephone number converting circuit.

In another preferred construction, the IP address/telephone number converting circuit includes

an IP address/telephone number conversion table which stores a user's telephone number corresponding to an IP address.

In another preferred construction, the mobile communication network is

a mobile communication network in a personal digital cellular telecommunication system (PDC).

In another preferred construction, the mobile communication network is

a mobile communication network to which the PIAFS standard in the personal handy phone system (PHS) is applied.

5 In another preferred construction, an IP address and a user's telephone number in the IP address/telephone number conversion table are

set by a manager of the mobile communication network accommodating the mobile communication switching system.

10 In another preferred construction, an IP address and a user's telephone number in the IP address/telephone number conversion table are

set through a terminal accommodated in the TCP/IP communication network by the execution of a  
15 communication control protocol for the IP address/telephone number conversion table of the IP address/telephone number converting circuit.

In another preferred construction, the provider access server and the mobile communication switching  
20 system

conduct switching connection for the transmission from the mobile communication terminal accommodated in the mobile communication network to the TCP/IP communication network.

25 In another preferred construction, the TCP/IP mobile communication network transmission and reception system further comprises

as well as the mobile communication terminal, a data terminal mounted at least with a browser, and a modulator and demodulator for enabling the data terminal to conduct transmission to the TCP/IP communication network through the mobile communication terminal, wherein

data including letters and images by means of IP packets is transmitted from the TCP/IP communication network.

According to another aspect of the invention, a method of conducting transmission from a TCP/IP communication network to a mobile communication network, comprising the steps of

sending out an IP packet in which an IP address of a mobile communication terminal as a transmission destination is stored at a header from a TCP/IP communication network,

receiving the IP packet from the TCP/IP communication network, and

extracting the IP address from the header of the received IP packet and searching for a user's telephone number corresponding to the IP address to send an originating signal and a selection signal based on the searched user's telephone number to a mobile communication network on the side of the mobile communication terminal.

In the preferred construction, the mobile

communication network is

a mobile communication network in a personal digital cellular telecommunication system (PDC).

5 In another preferred construction, the mobile communication network is

a mobile communication network to which the PIAFS standard in the personal handy phone system (PHS) is applied.

10 In another preferred construction, switching connection for the transmission from the mobile communication terminal accommodated in the mobile communication network to the TCP/IP communication network is conducted.

15 Other objects, features and advantages of the present invention will become clear from the detailed description given herebelow.

#### BRIEF DESCRIPTION OF THE DRAWINGS

20 The present invention will be understood more fully from the detailed description given herebelow and from the accompanying drawings of the preferred embodiment of the invention, which, however, should not be taken to be limitative to the invention, but are for explanation and understanding only.

25 In the drawings:

Fig. 1 is a block diagram showing a structure for use in an embodiment of the present invention

implementing a method of conducting transmission from a TCP/IP communication network to a mobile communication network and a transmission and reception system therefor;

5            Fig. 2 is a block diagram showing a structure of main components of a provider connection interworking function device illustrated in Fig. 1;

            Fig. 3 is a diagram showing a sequence at the execution of transmission from the Internet to a mobile communication terminal in the present embodiment;

10

            Fig. 4 is a diagram showing the contents of an IP address/telephone number conversion table illustrated in Fig. 1;

            Fig. 5 is a block diagram showing a structure of a conventional mobile communication system;

15

            Fig. 6 is a block diagram showing a functional structure of a provider connection interworking function device for Internet connection in the conventional mobile communication system;

20            Fig. 7 is a diagram showing a sequence at Internet connection in the conventional mobile communication system.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

25            The preferred embodiment of the present invention will be discussed hereinafter in detail with reference to the accompanying drawings. In the following

description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be obvious, however, to those skilled in the art that the present invention may be practiced  
5 without these specific details. In other instance, well-known structures are not shown in detail in order to unnecessary obscure the present invention.

Detailed description will be made of an embodiment of the present invention implementing a  
10 method of conducting transmission from a TCP/IP communication network to a mobile communication network and a transmission and reception system therefor with reference to the drawings.

In the drawings and description set forth below,  
15 the same components as those in Fig. 5 are allotted the same reference numerals.

Fig. 1 is a block diagram showing a structure for use in an embodiment of the present invention implementing a method of conducting transmission from a  
20 TCP/IP communication network to a mobile communication network and a transmission and reception system therefor.

In Fig. 1, the present example includes a data terminal (DTE) 1 such as a general-purpose small-sized computer (PC), a data communication adapter (MS-ADP) 2  
25 such as a modulator and demodulator (MODEM) for enabling the data terminal 1 to conduct transmission and reception to and from a mobile communication network,



and a mobile communication terminal 3 (MS) such as a portable telephone or a mobile data terminal. These are components for accessing an Internet 9 for a Web page by HTML data transmission through the mobile communication terminal 3 (portable telephone), for transmitting and receiving an electronic mail and for making an Internet telephone which will be described later.

This structure also includes a radio base station (BTS) 4 which will be connected through a line to the mobile communication terminal 3 in a radio zone within a service area (cell), a radio base station control device (BSC) 5 which accommodates the radio base station 4, and a mobile communication switching system (MSC) 6A which will connect to the radio base station control device 5 based on a common channel signaling system etc. to establish switching connection with a radio communication network (PDC/PHS) and a wired communication network (ISDN/PSTN).

This example further includes a time-division switch (TDNW) 6-1 for processing time-division with respect to line switching connection, a calling processing device (CP) 6-3 for executing calling control processing with respect to the mobile communication terminal 3 and a provider connection interworking function device (PRV-IWF) 6-2 for the connection with a provider (an access server/asynchronous serial-LAN protocol converter 7 and an Internet service provider 8

which will be described later), all of which components are provided in the mobile communication switching system 6A.

5       The example also includes an originating signal detection circuit (LC) 6-4 for detecting an originating signal (e.g. loop signal) from the provider connection interworking function device 6-2 and a selection signal reception circuit (DPREC) 6-5 for receiving a selection signal (a dial pulse string and a dual tone/push button  
10       (PB) signal) from the provider connection interworking function device 6-2 which signal is received through the originating signal detection circuit 6-4.

      In addition, the example includes the access server (ACC-SER/asynchronous serial-LAN protocol  
15       converter) 7 as a provider access server for sending out an IP packet, the Internet service provider (ISP) 8 and the Internet 9.

      Fig. 2 is a block diagram showing a structure of main components of the provider connection interworking  
20       function device 6-2. The provider connection interworking function device 6-2 includes terminating processing circuits (ARQ-RX and ARQ-TX) 10a and 10b for conducting terminating processing of an error control protocol on the side of the radio line, asynchronous  
25       terminating processing circuits (ASYNC-RX and ASYNC-TX) 11a and 11b for conducting terminating processing with respect to communication on a serial asynchronous line

with the access server 7 on the side of the Internet service provider (ISP) 8, and an SYN pattern detection circuit (SYN-DET) 10d for detecting an SYN (synchronizing signal) pattern in an IP packet sent from  
5 the access server 7 on the side of the Internet service provider 8.

The provider connection interworking function device 6-2 also includes an IP address/telephone number converting circuit (IP/Tel. No. CONV) 10e having an IP  
10 address/telephone number conversion table (see Fig. 4) for converting an IP address into a telephone number and a transmission signal sending circuit (Tel. Circuit) 10f for sending an off-hook signal (originating signal/loop signal) and a dial signal (selection signal) to the  
15 mobile communication switching system 6A.

Next, operation of the present embodiment will be described.

First, operation of calling from the mobile communication terminal (MS) 3 to the Internet 9  
20 (sequence) will be described in brief. The calling operation (sequence) is the same as that of the above-described conventional example illustrated in Fig. 7.

The mobile communication terminal 3, which is connected to the data terminal 1 through the data  
25 communication adapter 2, connects to the radio base station 4 in a radio zone (radio line). The radio base station control device 5 which accommodates numerous

radio base stations 4 is connected to the mobile communication switching system 6A through a line. Through the line connection with the mobile communication switching system 6A, the mobile communication terminal 3 conducts transmission to a radio communication network (PDC/PHS) or a wired communication network (ISDN/PSTN) and responds to reception.

When the mobile communication terminal 3 accesses the Internet 9, its line connection with the provider connection interworking function device 6-2 provided in the mobile communication switching system 6A is established through the above-described line connection with the mobile communication switching system 6A. The mobile communication switching system 6A is connected to the provider connection interworking function device 6-2 and the access server 7 (Internet service provider 8) to process the interface with the Internet 9.

Furthermore, the provider connection interworking function device 6-2 and the access server 7 are connected to each other through a line, so that the terminal 3 accesses the Internet 9 through the Internet service provider 8 to conduct HTML data transmission. For example, a Web page is accessed, or an electronic mail transmitted by the data terminal 1 is sent to an IP address destination of the Internet 9 (a Web page device accommodated in a terminal/Internet and a small-sized

general-purpose computer for electronic mail). In some cases, Internet telephone conversation which will be described later is made.

5 In such access operation from the mobile communication terminal 3 to the Internet 9, the time-division switch 6-1 in the mobile communication switching system 6A sets a user data transfer channel and a control channel and conducts time-division processing, the calling processing device 6-3 executes  
10 calling processing control with respect to the mobile communication terminal 3 and furthermore, the provider connection interworking function device 6-2 establishes line connection with a provider (access server 7 and the Internet service provider 8).

15 In the provider connection interworking function device 6-2 shown in Fig. 2, the terminating processing circuits 10a and 10b conduct terminating processing of the error control protocol on the side of the radio line and the asynchronous terminating processing circuits 11a  
20 and 11b conduct terminating processing with respect to the communication on a serial asynchronous line with the access server 7 on the side of the Internet service provider 8.

Next, description will be made of operation of  
25 conducting transmission from the Internet 9 to the mobile communication terminal 3.

Fig. 3 is a sequence diagram showing processing

at the transmission from the Internet 9 to the mobile communication terminal 3, and Fig. 4 is a diagram for use in explaining the contents of an IP address/telephone number conversion table in the IP address/telephone number converting circuit 10e  
5 illustrated in Fig. 2.

In order to conduct transmission to the mobile communication terminal 3 from a terminal or the like accommodated in the Internet 9, set in advance at the IP address/telephone number conversion table in the IP  
10 address/telephone number converting circuit 10e as shown in Fig. 4 are user's telephone numbers (090-\*\*\*\*-XXX 0-7) of numbers of mobile communication terminals 3 as transmission targets which are made one-to-one  
15 corresponding to IP addresses (a1a2a3 b1b2b3 c1c2c3 d1d2 0-7).

In order to conduct transmission to the desired mobile communication terminal 3 from a terminal accommodated in the Internet 9, connect to an access  
20 point in the Internet 9 to transmit an IP address in the IP address/telephone number conversion table shown in Fig. 4. The IP address is transferred to the access server 7 on the side of the Internet service provider 8 as the Internet protocol/transmission control  
25 protocol/synchronizing signal IP+TCP(SYN) shown in Fig. 3 and further transferred to the provider connection interworking function device 6-2.

At the provider connection interworking function device 6-2, user data to be transferred from the access server 7 to the terminating processing circuit 10b shown in Fig. 2 is extracted by its preceding stage

5 asynchronous terminating processing circuit 11b to extract a header of an IP packet which will be output to the SYN pattern detection circuit 10d. The SYN pattern detection circuit 10d detects an SYN (synchronizing signal) pattern in the IP packet.

10 The SYN pattern is the one that is first sent to the mobile communication switching system 6A from the Internet 9 as a transmission source at the setting of a TCP connection. Detection of the SYN pattern finds out the first arrival of an IP packet, whereby calling to  
15 the mobile communication switching system 6A will be conducted.

The header is applied to the IP address/telephone number converting circuit 10e through the SYN pattern detection circuit 10d. The IP address/telephone number  
20 converting circuit 10e searches for a user's telephone number of the mobile communication terminal 3 corresponding to the IP address in the header. In this search, the IP address/telephone number conversion table shown in Fig. 4 is checked.

25 More specifically, a user's telephone number of the mobile communication terminal 3 one-to-one corresponding to the IP address of the transmission

destination is searched for and extracted. The user's telephone number is applied to the transmission signal sending circuit 10f. The transmission signal sending circuit 10f outputs an originating signal to the mobile communication switching system 6A and sends out a dial signal (selection signal/dial pulse string and dual tone/push button (PB) signal) to the originating signal detection circuit 6-4.

The originating signal detection circuit 6-4 detects the originating signal and the selection signal reception circuit 6-5 receives the user's telephone number (selection signal) from the originating signal detection circuit 6-4. The selection signal reception circuit 6-5 transfers the originating signal and the user's telephone number to the calling processing device 6-3 (originating signal ORG/selection signal in Fig. 3).

The selection signal establishes line connection with the radio base station control device 5 through the time-division switch 6-1 in the mobile communication switching system 6A to further establish line connection to the radio base station 4. Subsequently, the radio base station 4 and the mobile communication terminal 3 are connected through a radio line. The mobile communication terminal 3 is connected to the data terminal 1 through the interface of the data communication adapter 2.

The data terminal 1 returns an answer. As a



result, the data communication adapter 2, the mobile communication terminal 3, the radio base station 4, the radio base station control device 5 and the mobile communication switching system 6A (calling processing device 6-3, time-division switch 6-1) are sequentially connected through a line by setup. The mobile communication switching system 6A sends out a seizing signal/(SEZ) to the provider connection interworking function device 6-2.

10           The provider connection interworking function device 6-2 returns an acknowledge (ACK) in response to the seizing signal (SEZ) to the mobile communication switching system 6A through the data communication adapter 2, the mobile communication terminal 3, the radio base station 4 and the radio base station control device 5. The mobile communication switching system 6A sets a radio-side path. The data communication adapter 2 and the provider connection interworking function device 6-2 set an automatic retransmission request (ARQ).

20           The provider connection interworking function device 6-2 returns an answer (ANS) to the mobile communication switching system 6A. The mobile communication switching system 6A sets a network-side path. The data terminal 1 sends out the IP address and the Internet protocol/transmission control protocol/synchronizing signal (IP+TCP(SYN)) to the access server 7, which are further transferred to the

Internet 9 through the Internet service provider 8.  
Thereafter, by TCP/IP link open between the data  
terminal 1 and the Internet 9, HTML data transmission is  
conducted between a terminal accommodated in the  
5 Internet 9 and the data terminal 1.

This HTML data transmission, in which data is  
transmitted in an IP packet in TCP/IP communication,  
will enable the data terminal 1 to transmit and receive  
an electronic mail to and from a terminal of the  
10 Internet 9. Also enabled is communication over a  
telephone. Telephone communication is realized with  
software such as "Internet Phone" and "Net Meeting"  
installed in the data terminal 1 and a terminal  
accommodated in the Internet 9 together with a Web  
15 browser and a transmitter/receiver (microphone/speaker  
etc.)

Thus, in the present embodiment, an SYN pattern  
is detected to find out the first arrival of an IP  
packet. As a result, calling to the mobile communication  
switching system 6A is allowed to enable transmission  
20 from a terminal accommodated in the Internet 9 to the  
mobile communication terminal 3 (reception at the mobile  
communication terminal 3).

Moreover, only by adding the originating signal  
25 detection circuit 6-4 and the selection signal reception  
circuit 6-5 to the mobile communication switching system  
6A and conducting control of transmission of the

circuits, an IP packet can be received at the mobile communication terminal 3 with ease.

An IP address/user's telephone number stored in the IP address/telephone number conversion table in the  
5 IP address/telephone number converting circuit 10e at the provider connection interworking function device 6-2 is set by a manager of the mobile communication network who arranges the mobile communication switching system 6A.

10 The IP address/user's telephone number can be set also by a user through a terminal (computer) accommodated in the Internet 9. In this case, a communication control device which executes a communication control protocol for this setting is  
15 connected to the provider connection interworking function device 6-2 to conduct control for newly setting or modifying an IP address/user's telephone number in the IP address/telephone number conversion table. Also in the terminal accommodated in the Internet 9, a  
20 communication control protocol for newly setting or modifying an IP address/user's telephone number is installed to change the setting.

Setting through the terminal (computer) accommodated in the Internet 9 is also possible, for  
25 example, by access to a Web page opened on the Internet 9 by the manager of the mobile communication switching system 6A. In this case, for example, a CGI program is

executed to set its IP address/telephone number  
conversion table at the IP address/telephone number  
conversion circuit 10e.

Although the present embodiment has been  
5 described with respect to a mobile communication network  
for a personal digital cellular telecommunication system  
(PDC) and the mobile communication terminal 3 thereof,  
it can be applied to other mobile phone systems. The  
present embodiment is applicable, for example, to a  
10 mobile phone system adopting a PIAFS (PHS Internet  
Access Forum Standard) in PHS.

As is clear from the foregoing description,  
according to the method of conducting transmission from  
a TCP/IP communication network to a mobile communication  
15 network and a transmission and reception system therefor  
of the present invention, an IP address of a mobile  
communication terminal as a transmission destination is  
extracted and a user's telephone number (originating  
signal and selection signal) corresponding to the IP  
20 address is sent to the mobile communication terminal of  
the mobile communication network.

As a result, as well as transmission from a  
mobile communication terminal accommodated in a mobile  
communication network for a personal digital cellular  
25 telecommunication system to a TCP/IP communication  
network which is conventionally possible, transmission  
from the TCP/IP communication network to the mobile

communication terminal using an IP packet is enabled to improve convenience in use.

In addition, simply adding a circuit for detecting an originating signal and a circuit for receiving a selection signal to a conventional mobile communication switching system and controlling the transmission of the circuits enables transmission to a mobile communication terminal from a TCP/IP communication network using an IP packet with ease.

Moreover, according to the method of conducting transmission from a TCP/IP communication network to a mobile communication network and the transmission and reception system therefor of the present invention, an IP address and a user's telephone number in the IP address/telephone number conversion table are set by a manager of the mobile communication network or set by a terminal accommodated in the TCP/IP communication network through the execution of a communication control protocol.

As a result, a user of the TCP/IP communication network is allowed to freely set an IP address and a user's telephone number to further improve convenience in use.

Although the invention has been illustrated and described with respect to exemplary embodiment thereof, it should be understood by those skilled in the art that the foregoing and various other changes, omissions and

additions may be made therein and thereto, without departing from the spirit and scope of the present invention. Therefore, the present invention should not be understood as limited to the specific embodiment set out above but to include all possible embodiments which  
5 can be embodied within a scope encompassed and equivalents thereof with respect to the feature set out in the appended claims.

74660-29

- 28 -

CLAIMS:

1. A TCP/IP-mobile communication network transmission and reception system for conducting transmission from a TCP/IP communication network to a mobile communication  
5 network, comprising:

a provider access server for the connection of a TCP/IP communication network to receive an IP packet in which an IP address of a mobile communication terminal from the TCP/IP communication network is inserted into a packet  
10 header; and

a mobile communication switching system for extracting said IP address from said packet header of said IP packet sent from the provider access server and searching for a user's telephone number corresponding to said IP  
15 address to send an originating signal and a selection signal based on the searched user's telephone number to a mobile communication network on the side of said mobile communication terminal.

2. The TCP/IP-mobile communication network  
20 transmission and reception system as set forth in claim 1, wherein

said mobile communication switching system including

a time-division switch for conducting time-  
25 division switching of line switching,

a provider connection interworking function device for extracting said IP address of the mobile communication terminal inserted in said IP packet sent from the provider access server and searching for said user's telephone number  
30 corresponding to the IP address to output a selection signal

74660-29

- 29 -

and an originating signal based on the searched user's telephone number,

an originating signal detection circuit for detecting an originating signal from the provider connection  
5 interworking function device,

a selection signal reception circuit for receiving a selection signal from the provider connection interworking function device, and

a calling processing device for executing control  
10 to send an originating signal from said originating signal detection circuit and a selection signal from said selection signal reception circuit to the mobile communication network on the side of said mobile communication terminal.

3. The TCP/IP mobile communication network  
15 transmission and reception system as set forth in claim 2, wherein

said provider connection interworking function device including

a terminating processing circuit for conducting  
20 terminating processing of an error control protocol on the side of a radio line,

an asynchronous terminating processing circuit for conducting terminating processing with respect to communication on a serial asynchronous line with the  
25 provider access server for TCP/IP communication network line connection,

a synchronous pattern detection circuit for detecting a synchronous pattern to determine first arrival



74660-29

- 30 -

of an IP packet transferred through the asynchronous terminating processing circuit,

an IP address/telephone number converting circuit for searching for said user's telephone number corresponding  
5 to said IP address of the mobile communication terminal which is inserted into said packet header of said IP packet from the synchronous pattern detection circuit, and

a transmission signal sending circuit for sending out an originating signal and a selection signal to the  
10 mobile communication switching system based on said user's telephone number from the IP address/telephone number converting circuit.

4. The TCP/IP·mobile communication network transmission and reception system as set forth in claim 3,  
15 wherein

said IP address/telephone number converting circuit including

an IP address/telephone number conversion table which stores said user's telephone number corresponding to  
20 said IP address.

5. The TCP/IP·mobile communication network transmission and reception system as set forth in claim 1, wherein

said mobile communication network is

25 a mobile communication network in a personal digital cellular telecommunication system (PDC).

6. The TCP/IP·mobile communication network transmission and reception system as set forth in claim 1, wherein

74660-29

- 31 -

said mobile communication network is

a mobile communication network to which the PIAFS standard in the personal handy phone system (PHS) is applied.

5 7. The TCP/IP·mobile communication network transmission and reception system as set forth in claim 4, wherein

said IP address and said user's telephone number in said IP address/telephone number conversion table are

10 set by a manager of the mobile communication network accommodating the mobile communication switching system.

8. The TCP/IP·mobile communication network transmission and reception system as set forth in claim 4,  
15 wherein

said IP address and said user's telephone number in said IP address/telephone number conversion table are

added through a terminal accommodated in the TCP/IP communication network by the execution of a  
20 communication control protocol for the IP address/telephone number conversion table of the IP address/telephone number converting circuit.

9. The TCP/IP·mobile communication network transmission and reception system as set forth in claim 1,  
25 wherein

said provider access server and said mobile communication switching system

74660-29

- 32 -

establishes switching connection for the transmission from the mobile communication terminal accommodated in the mobile communication network to the TCP/IP communication network.

- 5 10. The TCP/IP mobile communication network transmission and reception system as set forth in claim 1, further comprising,

as well as said mobile communication terminal, a data terminal mounted at least with a browser, and a  
10 modulator and demodulator for enabling said data terminal to conduct transmission to the TCP/IP communication network through the mobile communication terminal, wherein

data including letters and images by means of IP packets is transmitted from said TCP/IP communication  
15 network.

11. A method of conducting transmission from a TCP/IP communication network to a mobile communication network, comprising the steps of:

sending out an IP packet in which an IP address of  
20 a mobile communication terminal is inserted into a packet header from a TCP/IP communication network;

receiving the IP packet from the TCP/IP communication network; and

extracting the IP address from the packet header  
25 of the received IP packet and searching for a user's telephone number corresponding to the IP address to send an originating signal and a selection signal based on the searched user's telephone number to a mobile communication network on the side of said mobile communication terminal.

74660-29

- 33 -

12. The method of conducting transmission from a TCP/IP communication network to a mobile communication network as set forth in claim 11, wherein

said mobile communication network is

5 a mobile communication network in a personal digital cellular telecommunication system (PDC).

13. The method of conducting transmission from a TCP/IP communication network to a mobile communication network as set forth in claim 11, wherein

10 said mobile communication network is


a mobile communication network to which the PIAFS standard in the personal handy phone system (PHS) is applied.


14. The method of conducting transmission from a  
15 TCP/IP communication network to a mobile communication network as set forth in claim 11, wherein


switching connection for the transmission from the mobile communication terminal accommodated in the mobile communication network to the TCP/IP communication network is  
20 conducted.

SMART & BIGGAR  
OTTAWA, CANADA

PATENT AGENTS

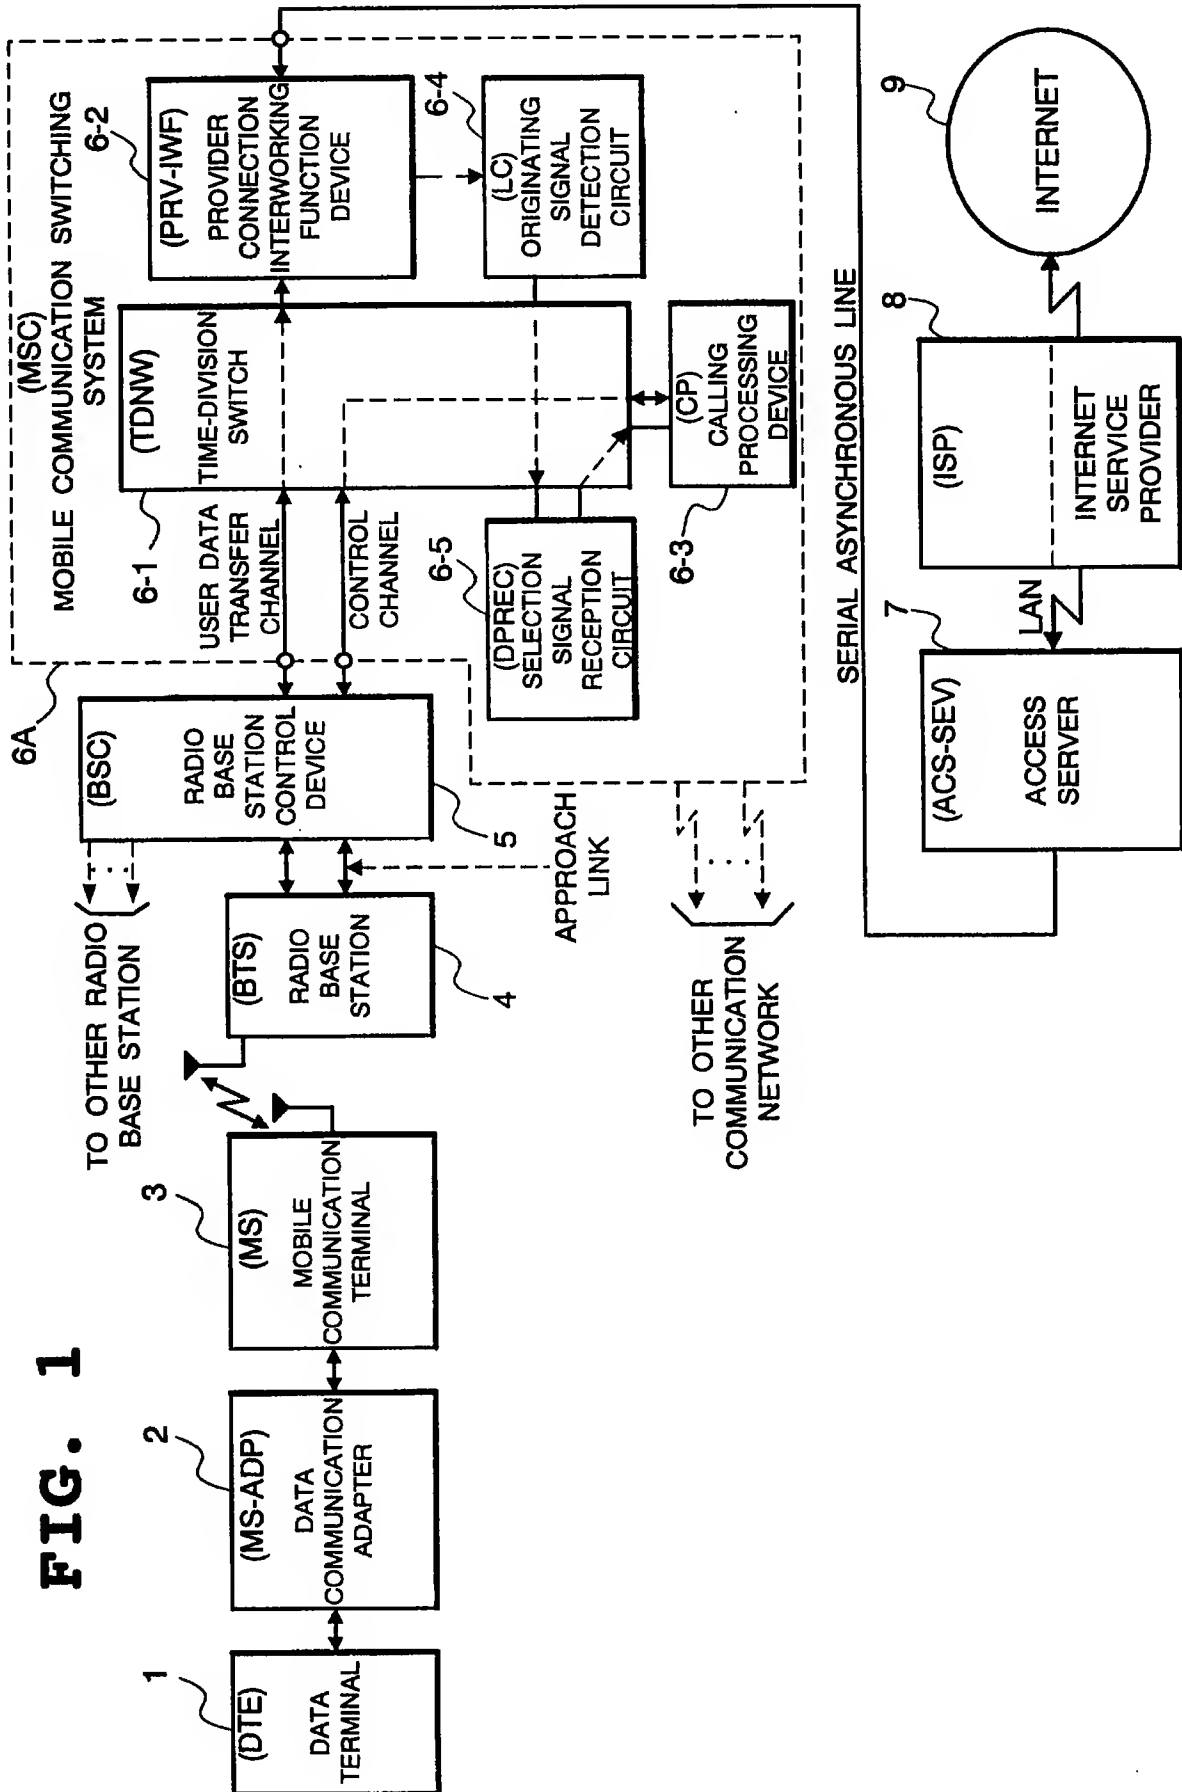

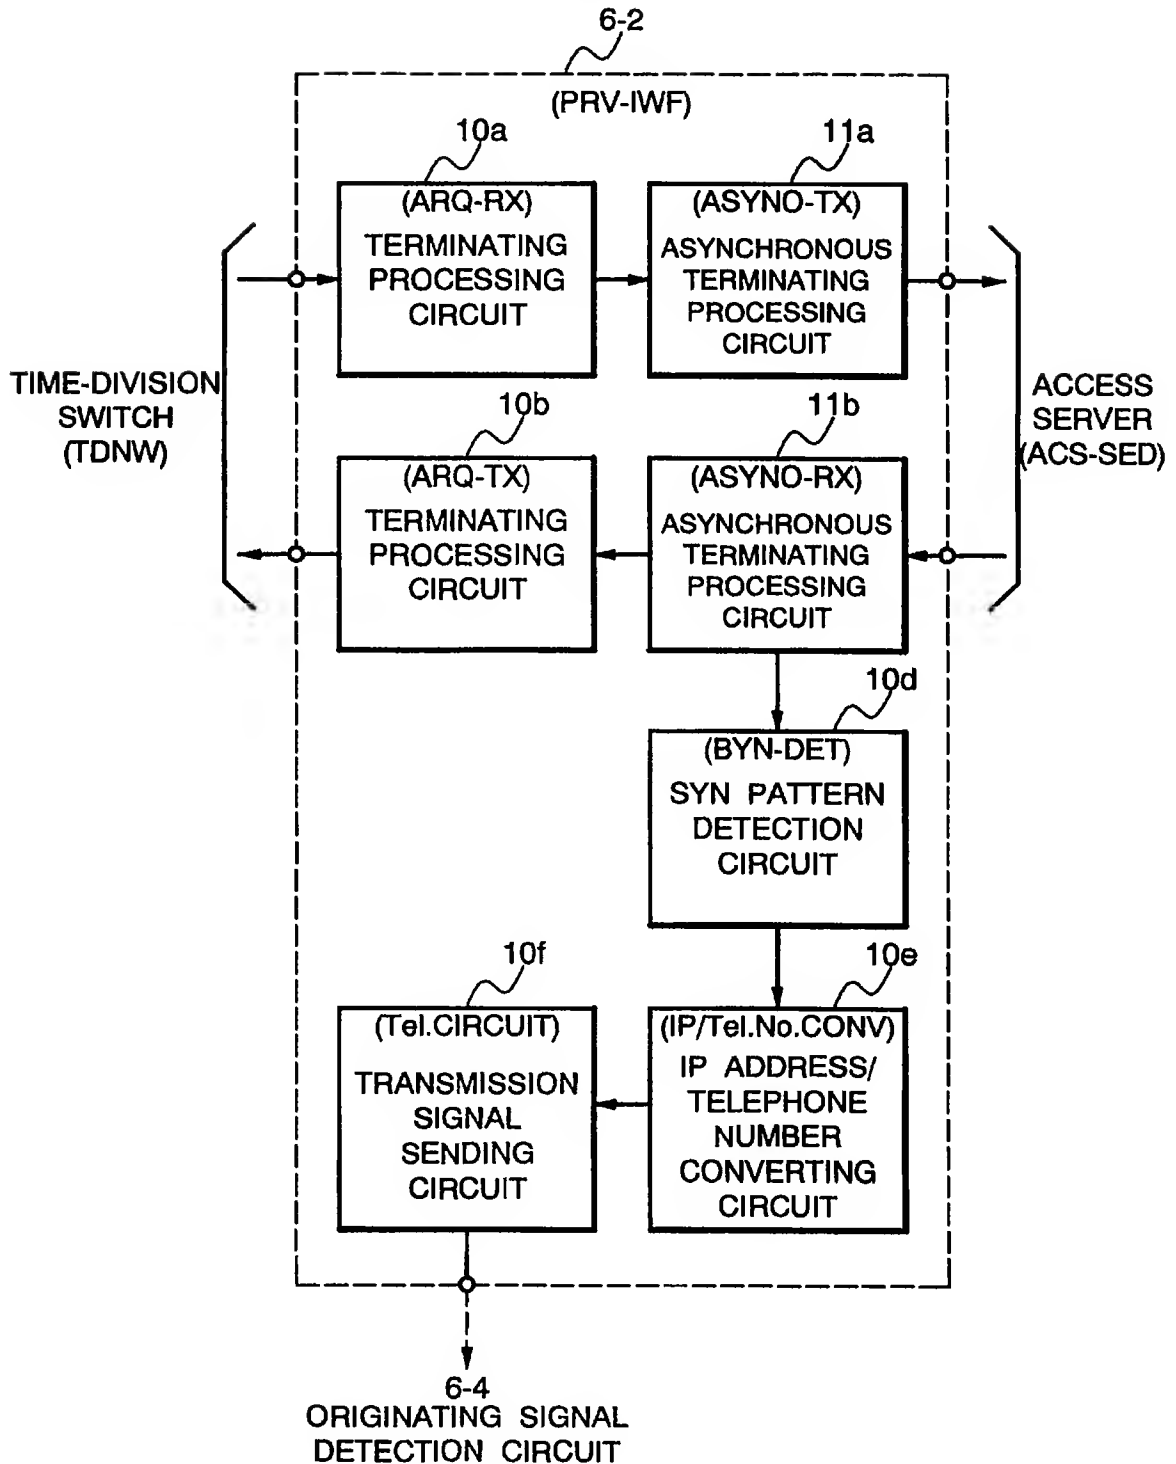
**FIG. 2**

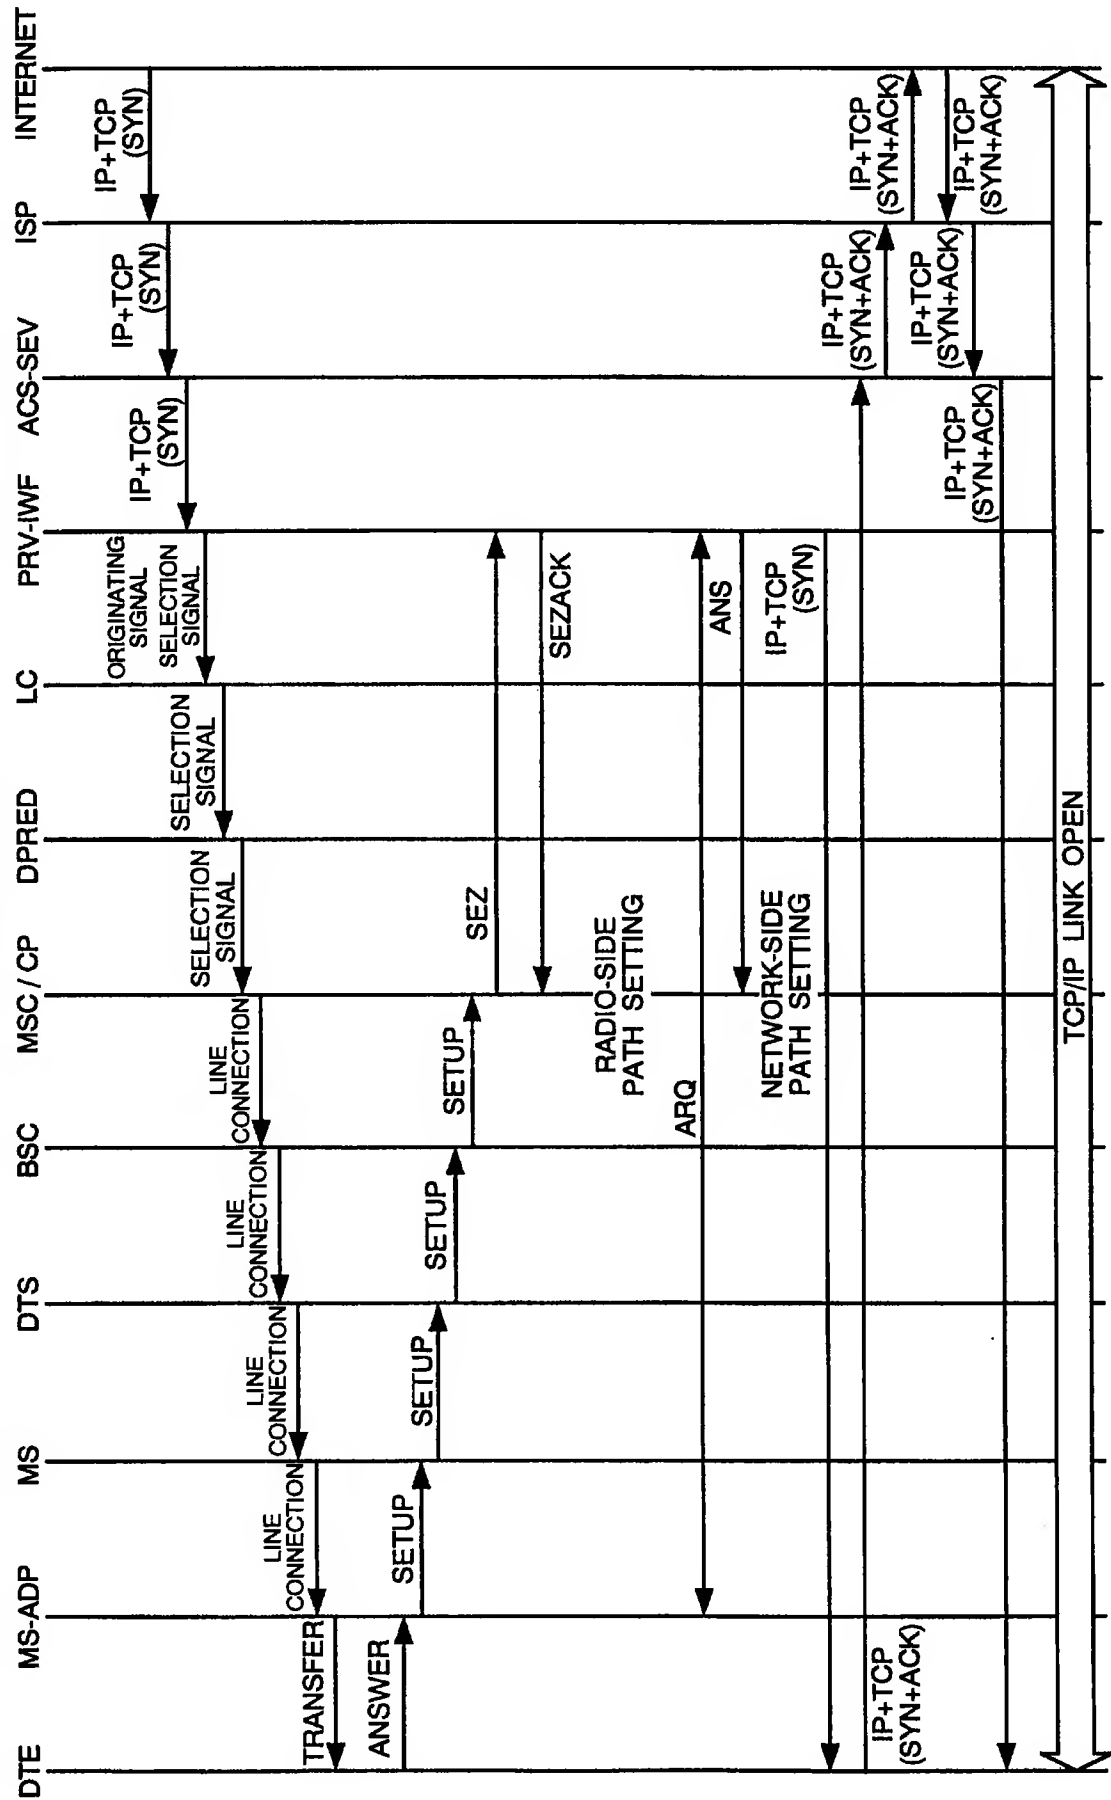
**FIG. 3**

**FIG. 4**

IP ADDRESS					USER'S TELEPHONE NUMBER
a1a2a3	b1b2b3	c1c2c3	d1d2	0	090 - * * * * - X X X 0
a1a2a3	b1b2b3	c1c2c3	d1d2	1	090 - * * * * - X X X 1
a1a2a3	b1b2b3	c1c2c3	d1d2	2	090 - * * * * - X X X 2
a1a2a3	b1b2b3	c1c2c3	d1d2	3	090 - * * * * - X X X 3
a1a2a3	b1b2b3	c1c2c3	d1d2	4	090 - * * * * - X X X 4
a1a2a3	b1b2b3	c1c2c3	d1d2	5	090 - * * * * - X X X 5
a1a2a3	b1b2b3	c1c2c3	d1d2	6	090 - * * * * - X X X 6
a1a2a3	b1b2b3	c1c2c3	d1d2	7	090 - * * * * - X X X 7



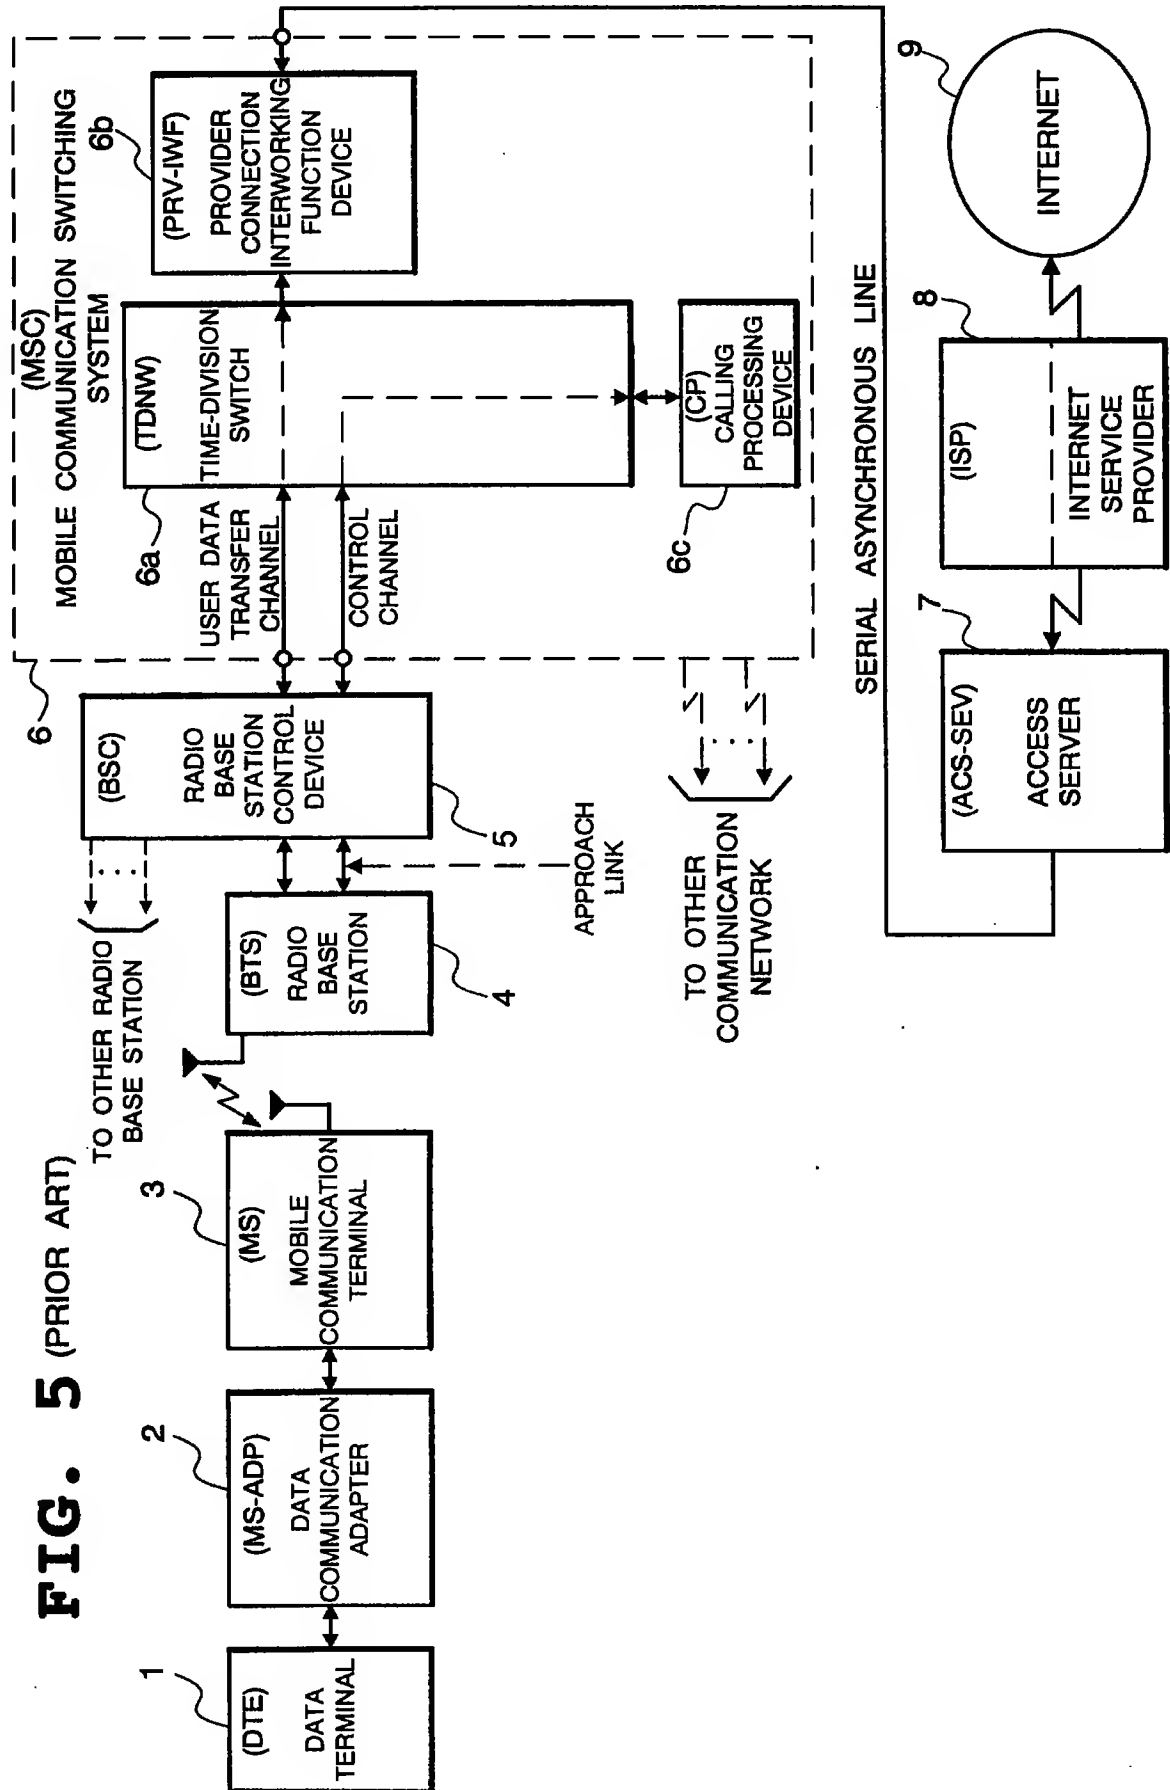

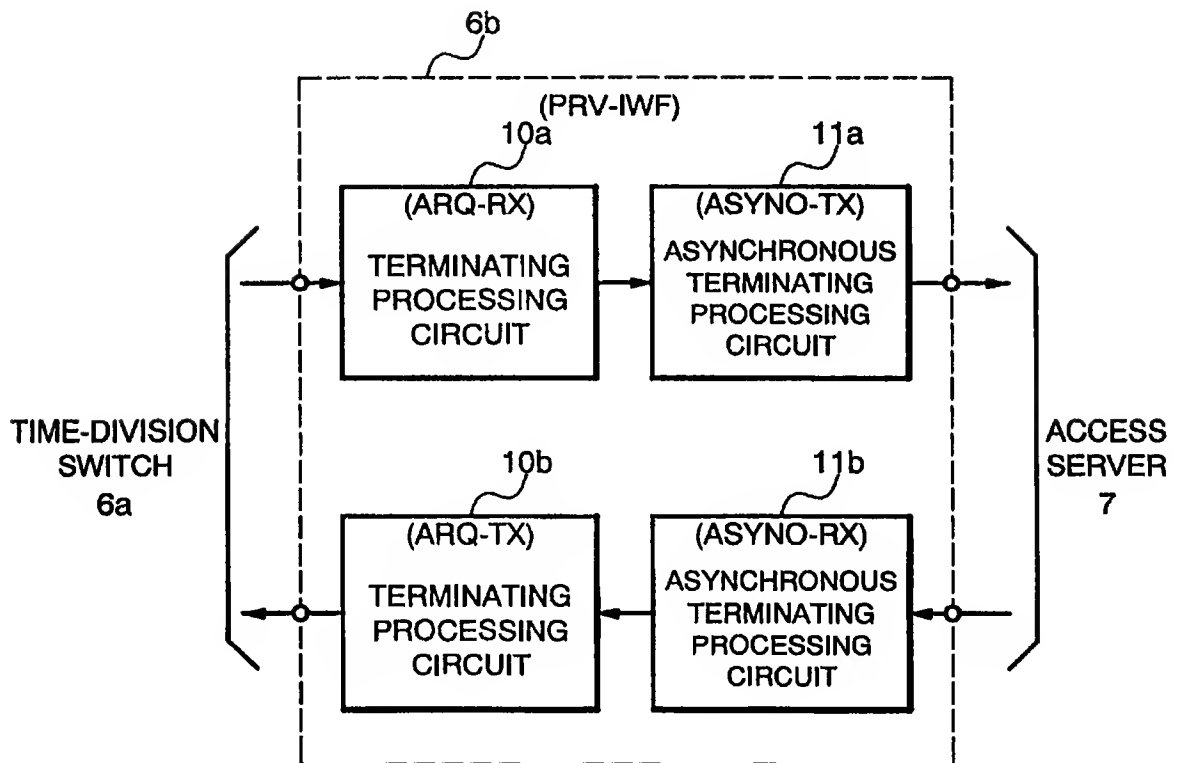**FIG. 6** (PRIOR ART)

**FIG. 7** (PRIOR ART)